

# CLARKE

## SPARTA SKIRTED

### Acrylic Tubs



Base Model #: \_\_\_\_\_ PSK(R or L)\*

### Features:

#### Basic (T):

- Constructed of high-gloss acrylic
- Available in White, Biscuit, Light Grey, Bone, or Black
- Textured slip resistant floor
- Pre leveled base
- Integral water barrier (on three sides for alcove installation)
- Integral Skirt

- Water capacity to overflow: \*

#### Hydrotherapy(W):

- 7.5 Amp/1.4 HP pump/motor
- Air on/off switch
- Safety suction & Hidden air induction valves
- 7 fully adjustable hydro jets
- 1 massage lower lumbar jet
- Minimum operating water capacity: 52 gal.

#### Air Massage(A):

- 1 HP blower with 200 W heating element
- Multi-Speed with 3 button control
- 20 min delay purge cycle
- Escutcheons at each air channel hole for added sanitation.

### Construction:

Clarke baths are constructed of the highest grade cast acrylic with fiberglass reinforced backing. Each tub features a pre-leveled base with supporting high density polyfoam blocks. The plumbing system on Clarke Hydrotherapy and Total Massage baths utilizes a smooth flex pvc & clamp system that limits water entrapment in the lines.

Every unit is performance tested with water prior to leaving the factory

### Certification:

Meets or exceeds the following specifications:

- IAPMO & ETL



### Notes:

- This product comes complete with installation, operating care and maintenance instructions.
- Electrical specifications: 120V, 20 Amp , GFCI protected circuit for pump and/or blower Optional heater must be installed on its own dedicated 120V, 20 AMP, GFCI protected circuit .
- All dimensions and specifications are nominal and may vary +/- 1/4". Use actual products for accuracy in critical situations.
- All Clarke baths feature a 2-Year limited warranty


\*see next page for specifications & base model numbers

# CLARKE


## SPARTA SKIRTED

### Specifications:


### Base Models:

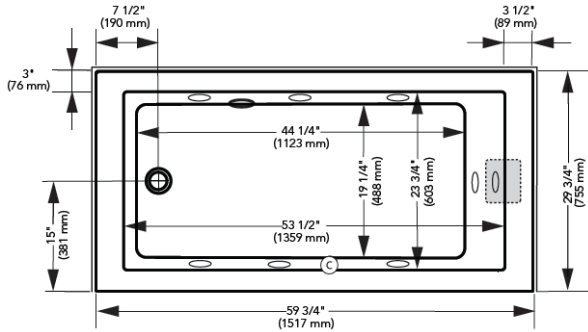

3060PSK(L hand shown here)


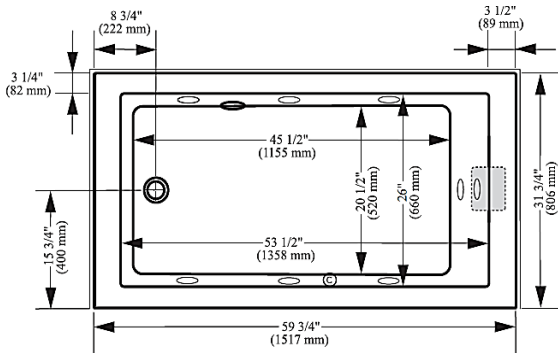


3260PSK(L hand shown here)

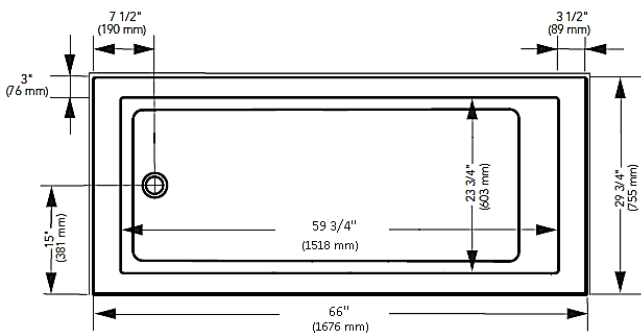

3066PSK(L hand shown here)

PRODUCT	LENGTH (L)	WIDTH (W)	HEIGHT (H)	OVERFLOW (O)	CAPACITY TO OVERFLOW
(Right or Left)	-	-	-	-	-
3060PSK	59 3/4"	29 3/4"	19 1/4"	16 1/2"	60
3260PSK	59 3/4"	31 3/4"	19 1/2"	16 1/2"	62
3066PSK	66"	29 3/4"	19 1/4"	16 1/2"	64
3266PSK	66"	31 3/4"	19 1/2"	16 1/2"	65

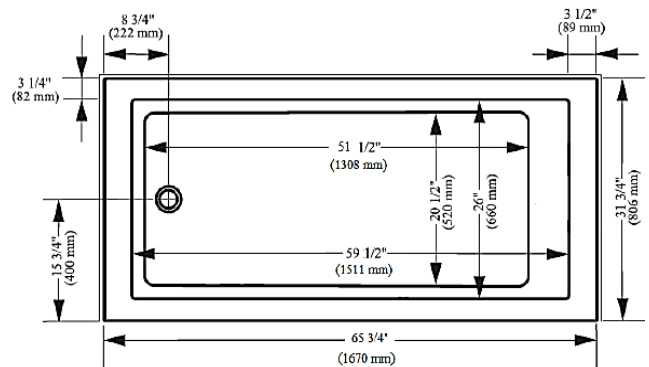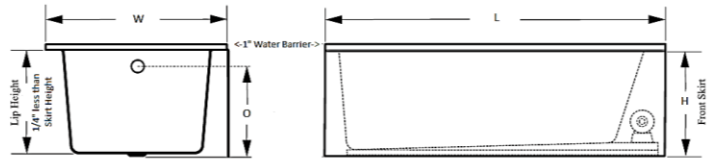

3266PSK(L hand shown here)